

AUTOMATIC FLOODS ALERTING SYSTEM USING GSM & PC

Karthikeyan.K¹ and Mrs.K.P.Jamunalaksmi²

¹P. G Scholar /Department of Electronics and Communication Engineering, Adithya Institute of Technology, Coimbatore, Tamilnadu, India.

²AssistantProfessor/Department of Electronics and Communication Engineering, Adithya Institute of Technology, Coimbatore, Tamilnadu, India.

Abstract: The purpose of a flood warning service is to detect and forecast threatening flood events so that the public can be alerted in advance and can undertake appropriate responses to minimise the impact of the event. This is a particularly important technology in developing countries, where flooding results in massive loss of life and property. Flood warnings are a highly important adaptive measure where protection through large scale, hard defences, is not desirable or possible. This may be the case if defences would cause adverse environmental or social problems, or where the cost of defence construction would be prohibitive. The project is to provide the sensor automatic Flood alerting system. Monitoring of water level, rain flow checking and Water flow velocity by the sensors. River water level and rain flow and water velocity status is monitored by the sensors and transfer to GSM and Computer. For easy surveying and with less delay the information can be send to the authority. To avoid flood based accident and to safeguard the people.

Keywords-Arduino AT 2560, Sensors, Speaker, LCD, GSM, Personal computer

I. INTRODUCTION

Nowadays Several types of natural disasters, it is known that flood is one of the most dangerous since they have enough destructive power to change the course of rivers, sweep away and destroy whatever is in their path. Our motivation for this work is based on all damages caused in our region due to floods; this natural disaster has caused many people to suffer damage to their homes and losing their belongings.[1]. Torrential rain pounded the region giving rise to widespread flooding by several rivers burst their banks. There exists encouragement for researching preliminary Solutions in this kind of disaster to mitigate and help in rescue operations. A variety of options there is for creating systems capable of warning vulnerable populations about an imminent threat of floods. The fact that the data collection of levels of water bodies is executed by a person and it carries dangers and delays in the dissemination of information. One of these risks is endangering the person who comes to take action, as torrential rains access to the measuring points are extremely complicated, and in cases of Possible flooding these delays are crucial to salvaging belongings and especially the lives of people living in areas at risk. Because of the expensive cost of gauges to measure water level and the importance of developing warning systems for measuring levels in rivers that contribute to safeguard lives of citizens who inhabit regions in danger of flooding, we present a water level sensor based on waterconductivity. Flooding monitoring is one of the big challenges increased due to uncontrolled growth of mega cities (Chennai, Mumbai). The article describes the population count and death rate due to flooding in four mega cities in India.

II. BLOCK DIAGRAM

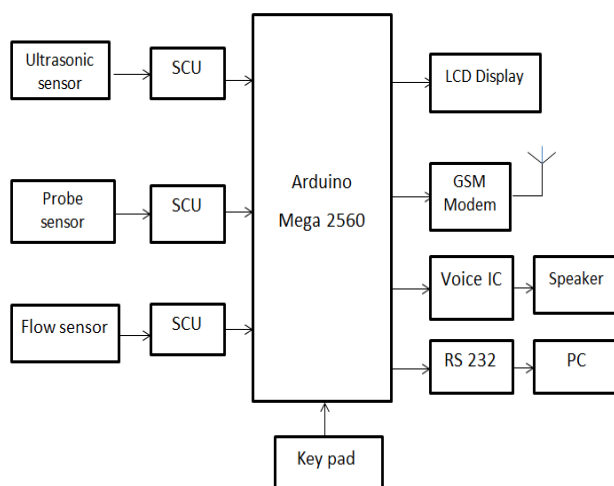


Fig.1. Automatic Flood Alerting System using GSM & PC

III. BACKGROUND

Nowadays it appeared the concept of internet of things as a topic emerged in the wireless technology field. Arduino AT mega 2560 have variety of devices such as sensors, pc, speaker and smart phones or mobile phones that through unique addressing schemes are able to communicate and announce the message and reach the common goals [1]. It is possible to use the concept of arduino mega 2560 to provide communication capability of all devices could alert opportunely to a population before a Flood disaster occurs [2]. In previous works dealing with this term [3], [4]. Before using sensors integrated into arduino mega 2560 ("things"-oriented vision) some works have been proposed to disaster situations [5], [6], [7], [9]. Specifically "things"-oriented vision works like [09], [10] where gsm technology is used. However, we are especially interested in those applications centred in disasters by floods. For example, a system for flood detection is alert [12]. This system uses remote sensors to transmit environmental data to a computer system. Various kind of sensors deployed in the alert system is rainfall, Probe Sensor, Flow sensor, and ultrasonic sensor. These sensors supply information to the centralized database system. Another example is found in [12], it is a landslide detection system using a GSM (wireless sensor network). This system has enabled a more convenient early warning system and provides a system able to learn about the phenomena of natural disasters.

Prevention of flood by the overflowing of rivers is able to process, analyse (by ruler and different types of measurement equipment's) and remotely sensed data to detect the occurrence of a flood. This system is the ideal solution, but is costly and not accurate. This project used hardware, software (including computer applications and programs), and communication capabilities are required to support and maintain this water level measurement system (ultrasonic sensors). Different type's studies have designed river level sensors using databases [17], processing raw data, extracting information and sending wirelessly this information to users. [13], [14], [15]. Another more previous works have studied similar issues such as [16]. Because of suddenly climate change rainfall is becoming more frequent often, therefore it causes heavy flooding. At the time monitor constantly the river level and density and velocity, so these measurements must be safe and to have all sensor are essential. According to location characteristics, different measuring principles can be used. A water level measurement enables to know the amount of water that have a river (used to ultrasonic level sensor), it also to know what level it can become dangerous because it may cause an overflow, therefore, cause floods. Saving level values can make predictions for future levels and behaviours in the water level of rivers, lakes, lagoons, ponds, and dams.

Nowadays river level is measure based on manual scale and different type of method follow using instrument. Most of the people is living nearest of the river. River water is measure using metric rule and collecting all the data and intimates the message to people. way of message passing using television and radios. Rivers living people cannot ready to move one place to another place because river water is reached in high range. This project is developed measure water density, velocity and water level. Any one is satisfaction the condition and announces water level is increased by speaker. The entire device is monitoring river water. it is result is accurate and contribute to safeguard lives of citizens. This project is different types of alerting system used like display LCD, Communication to drainage department (Mobile Communication), announce the message using speaker [17].

IV. RELATED STUDY

A. Arduino AT 2560 Architecture

Project is used to the Arduino mega 2560 because arduino is heart of the device. All the sub devices connected across it. This flash type reprogrammable and some peripheral devices to play this project perform. ATMEGA 2560 have 54 digital pin output and input. 16 pins used to analog input and 14 pins used to output purpose. It provides sufficient power to all the peripheral devices. Power need not give individually to all devices. All the devices also activates as low power operation mode. The Arduino Software contains a text editor for writing code, a message area, a text console, a toolbar with buttons for common functions and a series of menus. It connects to the Arduino and Genuine hardware to upload programs and communicate with them. Programs written using Arduino Software are called sketches. These sketches are written in the text editor and are saved with the file extension. The editor has features for cutting, pasting, searching and replacing text. The message area gives feedback while saving and exporting and displays errors. The console displays text output by the Arduino Software, and complete error messages and other information. The bottom right-hand corner of the window displays the configured board and serial port. The toolbar buttons is used to allow verifying and uploading programs, creating, opening, and saving sketches, and opening the serial monitor. This project is implemented with Arduino mega 2560 microcontroller using GSM module. The arduino mega 2560 has different types of facilities for communication and microcontroller [18].

B. GSM (Global System for Mobile Communications)

The GSM which is one of the representative wireless. GSM is the most popular standard for mobile telephony systems in the world. its improve industry status and reached all over world of mobile phone carriers and manufacturers, estimates that 95% of the global mobile market uses the standard GSM is used by over 1.5 billion people across more than

200 countries and territories. It enables international roaming arrangements between mobile network operators, providing subscribers the use of their phones in many parts of the world. GSM differs from its predecessor technologies in that both signalling and speech channels are digital, and thus GSM is considered a second generation (2G, 3G, 4G) mobile phone system. This also facilitates the wide-spread implementation of data communication applications into the system. A GSM modem is used to interface that allows applications such as SMS to send and receive messages over the modem interface. This project is used GSM module for intimate to water level status using sensor and microcontroller the mobile operator charges for this message sending and receiving as if it was performed directly on a mobile phone. To perform these tasks, a GSM modem must support an "extended AT command set" for sending/receiving SMS messages.



Fig.2 GSM Modem

C. Sensors

This project is used three sensor ultrasonic sensor, probe sensor and flow sensor. Sensor is the most important of create project. Sensors are sense the water density, speed of water and level of water.

Sensor is communicate to microcontroller and display the result and safeguard of the people

V. HARDWARE RESOURCES

A. Arduino AT 2560 Microcontroller:

The Arduino Mega 2560 is a microcontroller board based on the ATmega2560. It has 54 digital input/output pins (of which 14 can be used as PWM outputs), 16 analog inputs, 4 UARTs (hardware serial ports), a 16 MHz crystal oscillator, a USB connection, a power jack, an ICSP header, and a reset button. It contains everything needed to support the microcontroller; simply connect it to a computer with a USB cable or power it with a AC-to-DC adapter or battery to get started. The Mega is compatible with most shields designed for the Arduino Duemilanove or Diecimila.

B. Power Supply:

The ac voltage, typically 220V rms, is connected to a transformer, which steps that ac voltage down to the level of the desired dc output. A diode rectifier then provides a full-wave rectified voltage that is initially filtered by a simple capacitor filter to produce a dc voltage. This resulting dc voltage usually has some ripple or ac voltage variation. The potential transformer will step down the power supply voltage (0-230V) to (0-15V) level. If the secondary has less turns in the coil than the primary, the secondary coil's voltage will decrease and the current or AMPS will increase or decreased depend upon the wire gauge. This is called a STEP-DOWN transformer. Then the secondary of the potential transformer will be connected to the rectifier.

C. Ultrasonic Sensor:

The Ultrasonic Water Level Sensor uses the latest ultrasonic distance measuring technology for accurate non-contact water level monitoring. ... The 125 cm ultrasonic water level sensor ranges are best for measuring river, lake and tank levels and for measuring open channel flow in larger flumes. Ultrasonic Water Level Sensor uses the latest ultrasonic distance measuring technology for accurate non-contact water level monitoring. The ultrasonic water level sensors contain a rugged transducer in stainless steel sealed housing for long life and provide an industry standard 4-20 mA output. The 125cm an ultrasonic water level sensor ranges are best for measuring river, lake and tank levels and for measuring open channel flow in larger flumes. Ultrasonic water level sensor installation is simple and requires no programming or calibration.

D.Probe Sensor:

Probe sensor is a switching device that gets activated by Water density. The Probe sensor detects water that completes the circuits on its sensor boards' printed leads. The sensor board acts as a variable resistor that will change from 100k ohms when wet to 2M ohms when dry. In short, the wetter the board, more current will be conducted. The Probe sensor detects the velocity of rainfall.

E.Flow Sensor:

Flow Sensor is used to find out velocity of Water Flow. Flow Sensor is working based on speed of inside the fan. The fan is rotate based on flow of water. This paper is used flow sensor calculated speed of Water level. This sensor is reach maximum level of the speed at the time of automatically decrease the value of Ultrasonic sensor because water level is reached is up normal level.

E.LCD:

Liquid crystal displays have materials which combine the properties of both liquids and crystals. Rather than having a melting point, they have a temperature range within which the molecules are almost as mobile as they would be in a liquid, but are grouped together in an ordered form similar to a crystal. An LCD consists of two glass panels, with the liquid crystal material sandwiched in between them. The inner surface of the glass plates are coated with transparent electrodes which define the character, symbols or patterns to be displayed. Polymeric layers are present in between the electrodes and the liquid crystal, which makes the liquid crystal molecules to maintain a defined orientation angle. LCDs are lightweight with only a few millimetres thickness. It is working less power, they are compatible with low power electronic circuits, and can be powered for long durations. The power supply should be of +5V, with maximum allowable transients of 10mv. The LCDs used exclusively in watches, calculators and measuring instruments are the simple seven-segment displays, having a limited amount of numeric data. The recent advances in technology have resulted in better legibility, more information displaying capability and a wider temperature range. The LCDs have even started replacing the cathode ray tubes (CRTs) used for the display of text and graphics, and also in small TV applications. LCD module is used in this project to display the sensors' results like water velocity, density and water level. The module should be isolated from the other circuits, so that stray voltages are not induced, which could cause a flickering display.

G.Speaker:

Speaker is used to announce the status of the flood in water Board department. Water level status announced stage by stage. Water of normal in river at the time Speaker will announce "The river stage is rising". Water will be continues rising at the time Speaker announce "The river water level is continues rising" Water will reached in high position at the time of speaker announce "The river stage reached the highest level –Imminent Flood EVACUATION.

H.RS232:

In communications, **RS-232** is a standard for serial binary data interconnection between Data terminal equipment and a Data Circuit-terminating Equipment. It is commonly used in computer serial ports. This is used to communicate the message to personal computer.

I.Keypad:

Keypad is used to enter the particular mobile number. Which mobile number is entered using keypad and send the message to particulate mobile number water status"water level is rising"

VI RESULT

1. PROBE SENSOR RESULT

Probe Sensor is used to indicate the density of water. Probe sensor is high voltage during water density reached to high and send the message to authorised mobile number, announce to Water level is raising through speaker and Computer display Message of water level status.


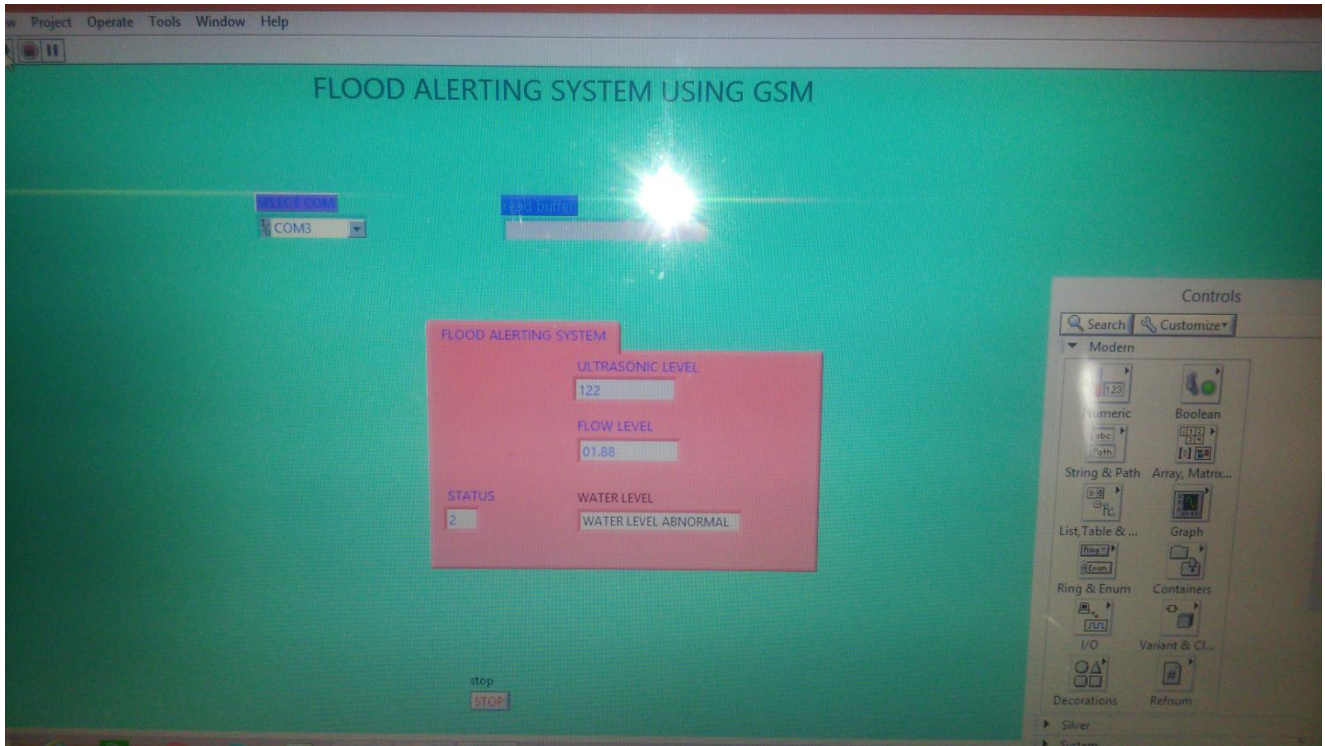


Fig 3. Probe Sensor Status Result

2. FLOW SENSOR RESULT

Flow Sensor is used to find out velocity of Water Flow. Whenever flow of water speed is high at the time send the message to authorised mobile number, announce to Water level is rising through speaker and Computer display Message of water level status. This sensor is reach maximum level of the speed at the time of automatically decrease the value of Ultrasonic sensor (Decreased value is represent Water level high level).


2.1. PC Display

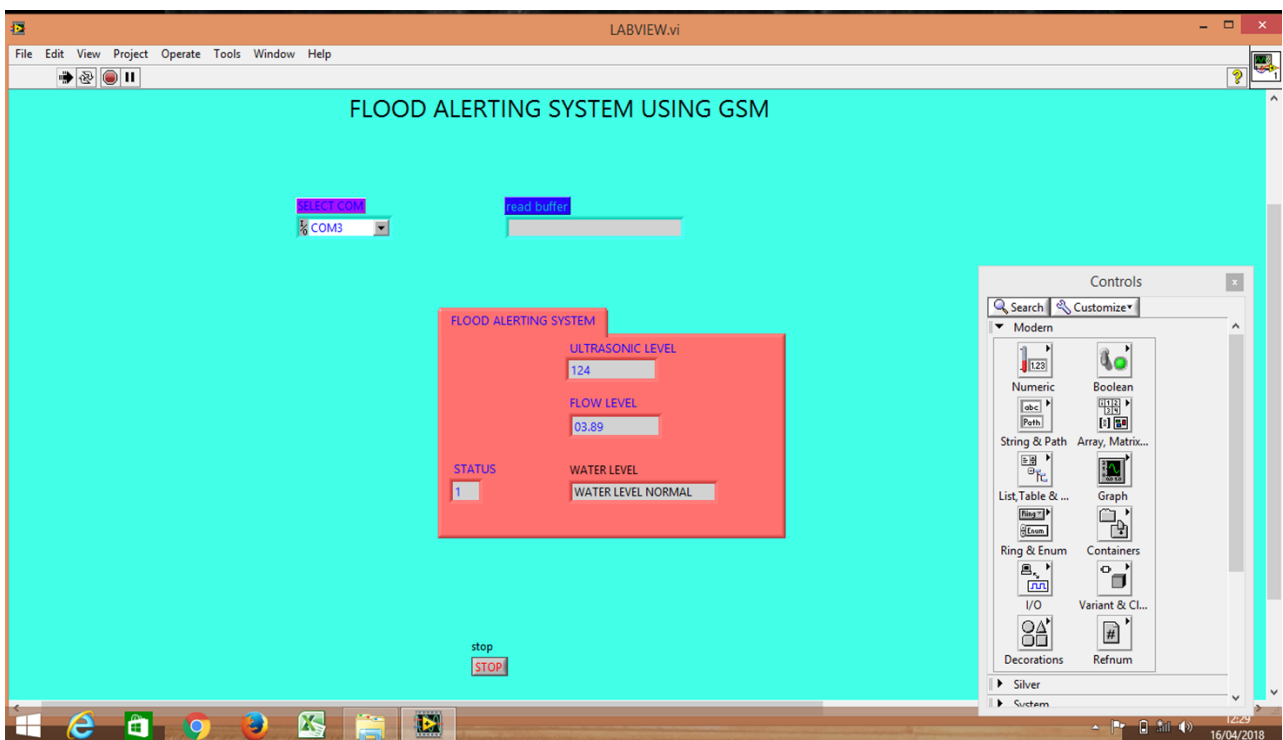

2.2.LCD Display




2.3.Mobile Display

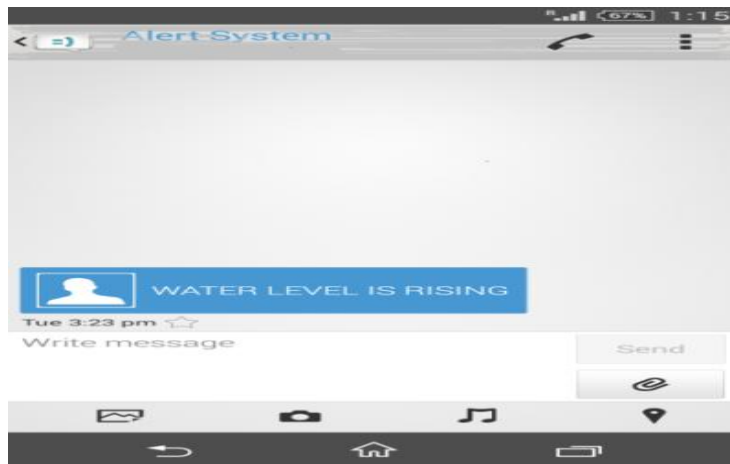

3. ULTRASONIC SENSOR RESULT:

Ultrasonic sensor is used to measure Water level. Probe sensor and Flow sensor are reached high at the time Ultra sensor to below value because water level was high and send the display the value of Ultrasonic and flow sensor in the pc and LCD Display.


3.1. PC Display

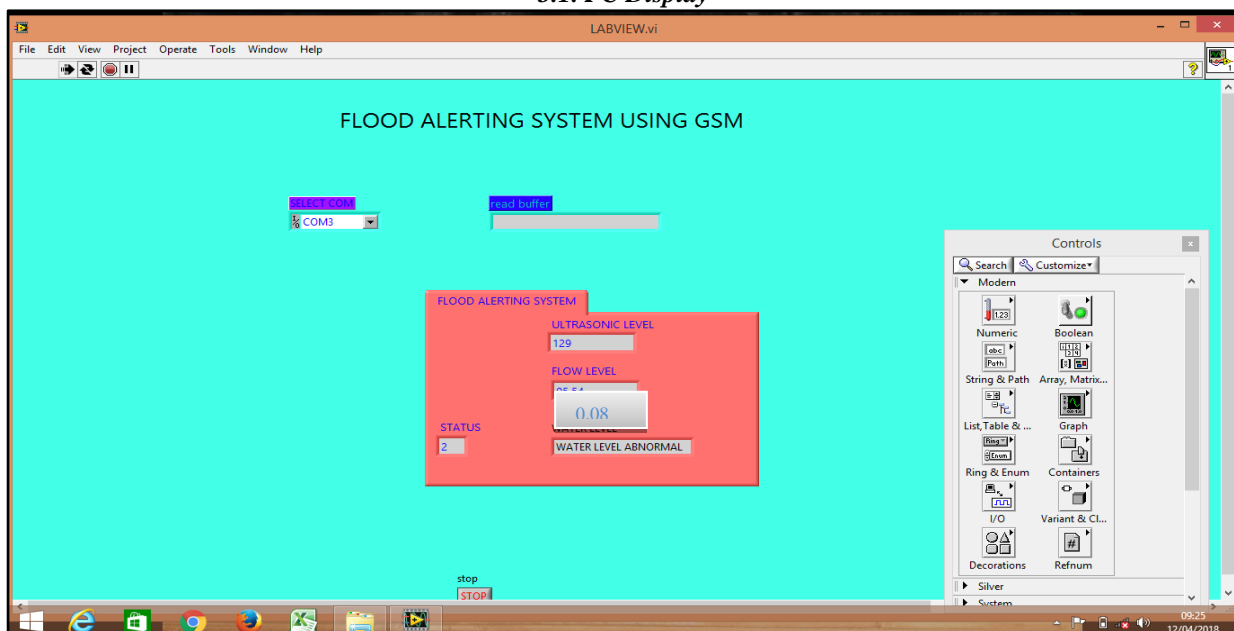

3.2 LCD Display



3.3. Mobile Display

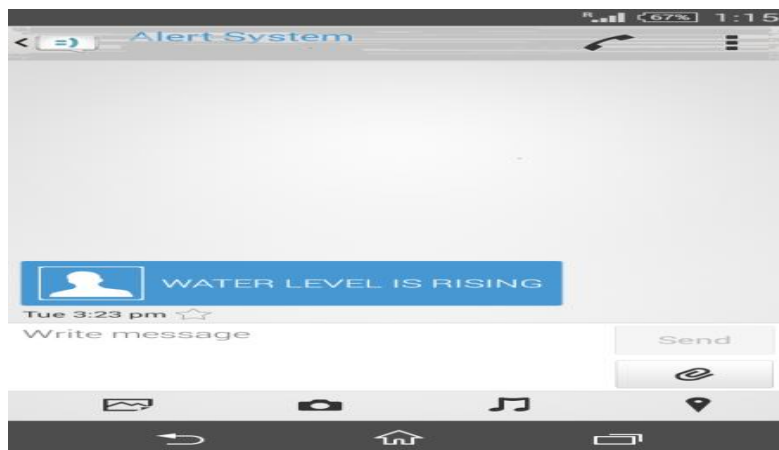

VII CONCLUSION

The application of urban flood alert system using GSM which is based on arduino and sensors of things technology provides comprehensive monitoring and pays more attention to the management flooding prevention. It also provides operational services, conducts the monitoring and realizes the comprehensive supervision management, early warning management, and investigation management, which has not only improved the flood control decision making and drainage, but the city's flood control capacity is significantly improved. It will contribute to the security of society and harmonious development and construction.

VIII REFERENCE

- [1] D. Giusto, A. Iera, G. Morabito, and L. Atzori, The Internet of Things. Springer-Verlag, 2010.
- [2] L. Atzori, A. Iera, and G. Morabito, "The internet of things: A survey," *Computer Networks*, vol. 54, no. 15, pp. 2787 – 2805, 2010.
- [3] D. Miorandi, S. Sicari, F. D. Pellegrini, and I. Chlamtac, "Internet of things: Vision, applications and research challenges," *Ad Hoc Networks*, vol. 10, no. 7, pp. 1497 – 1516, 2012.
- [4] J. Gubbi, R. Buyya, S. Marusic, and M. Palaniswami, "Internet of things (iot): A vision, architectural elements, and future directions," *Future Generation Computer Systems*, vol. 29, no. 7, pp. 1645 – 1660, 2013
- [5] W. Kang and Y. Shibata, "Performance Evaluation of Disaster Information System Based on P2P network," in *Advanced Information Networking and Applications Workshops (WAINA)*, 5 2010 IEEE 24th International Conference on, 20-23 2010, pp.710-715.
- [6] J. Kim, D. Kim, S. Jung, M. Lee, K. Kim, C. Lee, J. Nah, S. Lee, J. Kim, W. Choi, and S. Yoo, "Implementation and Performance Evaluation of Mobile Ad Hoc network for Emergency Telemedicine System in Disaster Areas," in *Engineering in Medicine and Biology Society, 2009. EMBC 2009. Annual International Conference of the IEEE*, 3-6 2009, pp. 1663 –1666.
- [7] S. Saha and M. Matsumoto, "A Framework for Data Collection and Wireless Sensor Network Protocol for Disaster Management," in *Proceedings of the Second International Conference on Communication System software and Middleware (COMSWARE 2007) Bangalore, India*. IEEE, January 2007, pp. 7–12.

- [8] Y. Shibata, Y. Sato, N. Ogasawara, and G. Chiba, "A Disaster Information System by Ballooned Wireless Adhoc Network," *Complex, Intelligent and Software Intensive Systems, International Conference*, vol. 0, pp. 299–304, 2009.
- [9] M. A. Wister, F. Acosta, P. Pancardo, and J. A. Hernandez-Nolasco, "Towards An Intelligent Environment for Urban Flood Rescue Scenarios," *International Journal of Engineering Research and Applications (IJERA)*, pp. 1040–1044, Sep-Oct 2013.
- [10] ALERT, "ALERT USER GROUP system organization. <http://www.alertsystems.org>," 2012.
- [11] M. Sudhneer, *Wireless Sensor Network for Disaster Monitoring*, ser. Wireless Sensor Networks: Application-Centric Design. In Tech. JanezaTrdine 9, 51000 Rijeka, Croatia, December 2010.
- [12] R. Fantacci, M. Vanneschi, C. Bertolli, G. Mencagli, and D. Tarchi, "Next generation grids and wireless communication networks: towards a novel integrated approach," *Wirel. Commun. Mob. Comput.*, vol. 9, no. 4, pp. 445–467, 2009.
- [13] Z. Chowdhury, M. Imtiaz, M. Azam, M. Sumi, M. Rahman, F. Alam, I. Hussain, and N. Hassan, "Design and deployment of a robust remote river level sensor network," in *Sensors Applications Symposium (SAS), 2011 IEEE*, Feb 2011, pp. 244–249.
- [14] X. Yang, M. Ke, Y. Chen, H. Li, J. Liu, and T. Yang, "Water level measuring network design and implementation," in *Information Engineering and Computer Science (ICIECS), 2010 2nd International Conference on*, Dec 2010, pp. 1–4.
- [15] H. Zhang, W. Tao, and M. Cao, "Development and application of mobile water level monitoring based on multi-sensor integration," in *Electrical and Control Engineering (ICECE), 2010 International Conference on*, June 2010, pp. 803–806.
- [16] D. Farrell, "The next generation water level measurement system: the next step in real-time data for navigation," in *OCEANS '88. A Partnership of Marine Interests. Proceedings*, Oct 1988, pp. 1587–1588 vol.4.
- [17] J. Boon, R. Heitsenrether, and W. Hensley, "Multi-sensor evaluation of microwave water level measurement error," in *Oceans, 2012*, Oct 2012, pp.1–8.
- [18] <https://circuitdigest.com/microcontroller-projects/water-level-indicator-project-using-arduino>.

BIOGRAPHY



I am K.Karthikeyan, I am pursuing M.E applied electronics at Adithya institute of Technology, Coimbatore. I completed my B.E degree in Electronics and communication engineering from Government College of technology, Coimbatore. My areas of interest are Embedded System and Wireless Communication System.



Mrs.K.P.Jamunalakshmi completed her M.E VLSI –Design from Ann University region, Coimbatore, in the year of 2013,. Now he is working as Asst.Professor in Adithya institute of Technology from 2014.